

T11 4,600 LITRE



Offshore Portable Tank



4,600 LITRE



A Marmon/Berkshire Hathaway Company

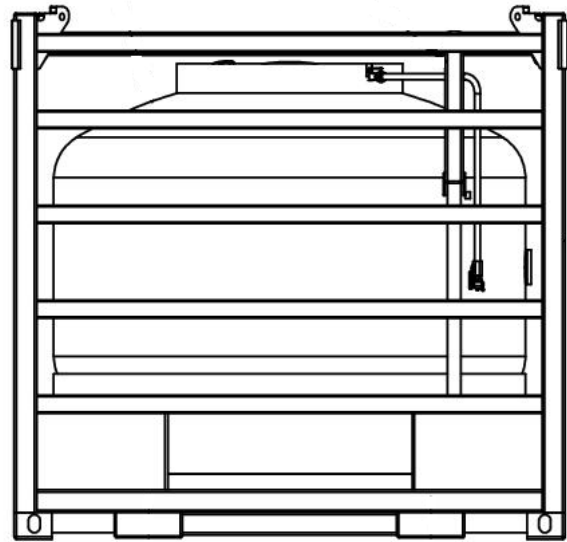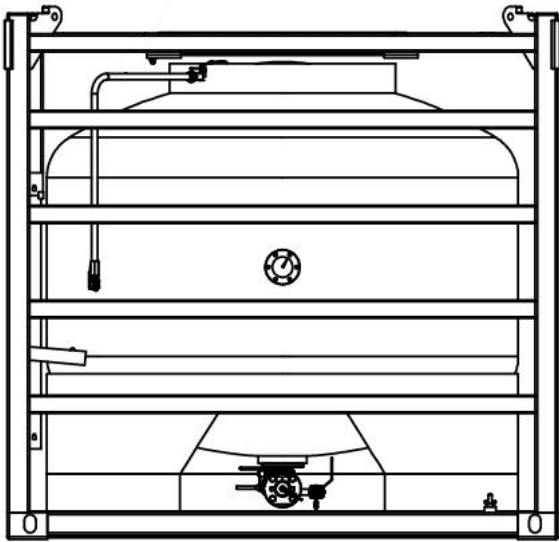

T11 4,600 LITRE

Offshore Portable Tank

General Specification

Dimensions	mm	ft-in	Frame	Steam Heating
Length	2,438	8' 0"	Forklift Pockets	None
Width	2,438	8' 0"	Lifting Lugs	Approvals T11 UN Portable tank (covering IMDG, ADR/RID) DNV2.7-1, EN12079.
Height	2,355	7' 8"	Harness Pole	
Capacity	Litres	Gallons	US Gallons	
	4,600	1,012	1,215	
Shell Material	EN 1.4401/04 (316/316L) Stainless Steel			
Pressures	Working = 4.0 Bar Test = 6.0 Bar Vacuum = 0.4 Bar			
Design Temp	-20°C to +100°C			
Design Code	ASME VIII Division 1 where applicable			
Weights	kgs			
Tare	2,500			
Max. Payload	4,250			
Max. Gross	6,750			
			Fittings	
			Manlid	Fort Vale 460mm, hinged with 6 point fastenings.
			Airlines	¾" BSP lockable top mounted ball valve leading to secondary ¾" ball valve operable from ground level and c/w ¾" BSP end connector and retained ¾" stainless steel dustcap.
			Bottom Outlet	Fort Vale 3" bottom outlet pad c/w 3" 90 degree highlift footvalve reduced down to 2" pipe extending to flanged 2" ball valve c/w a 2" BSP spigot with retained dustcap.
			Safety Relief Valve	2 ½" BSP Super Maxi pressure / vacuum valve set at 4.4 bar/ 0.21 bar with flame gauze fitted.
			Level Gauge	Bayham level gauge fitted to tank body in line with bottom outlet.

Note: The above information is an average representation of technical data. Please consult your OCS representative for more specific data.



Visit our website www.exsif-ocs.com

EXSIF OCS Limited, Aberdeen. Tel: + 44 (0) 1224 894643 Contact: info@exsif-ocs.com