

T11 3,000 LITRE



Offshore Portable Tank



3,000 LITRE



A Marmon/Berkshire Hathaway Company

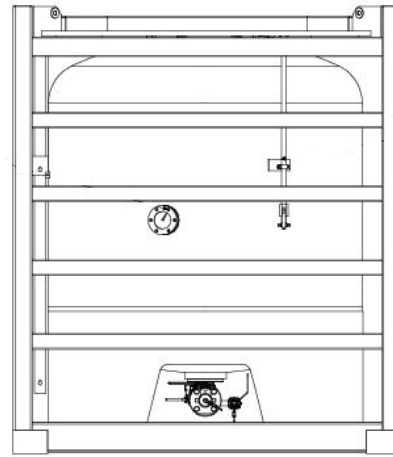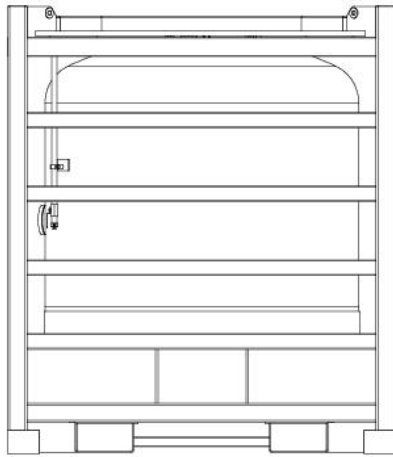

T11 3,000 LITRE

Offshore Portable Tank

General Specification

Dimensions	mm	ft-in	Frame	Steam Heating
Length	2,000	6' 7"	Forklift Pockets	None
Width	2,000	6' 7"	Lifting Lugs	
Height	2,310	7' 7"		
Capacity	Litres	Gallons	US Gallons	Approvals
	3,000	660	792	T11 UN Portable tank (covering IMDG, ADR/RID) DNV2.7-1, BS EN12079.
Shell Material	EN 1.4401/04 (316/316L) Stainless Steel			
Pressures	Working = 4.0 Bar (58.0 psi) Test = 6.0 Bar (87.0 psi) Vacuum = 0.42 Bar (6.1 psi)			
Design Temp	-20°C to +100°C			
Design Code	ASME VIII Division 1			
Weights	kgs			
Tare	1,900			
Max. Payload	4,600			
Max. Gross	6,500			
			Fittings	
			Manlid	Fort Vale 460mm, hinged with 6 point fastenings.
			Airlines	¾" BSP lockable top mounted ball valve leading to secondary ¾" ball valve operable from ground level and c/w ¾" BSP end connector and retained dustcap.
			Bottom Outlet	Fort Vale 3" bottom outlet pad c/w 3" 90 degree highlift footvalve reduced down to 2" pipe extending to flanged 2" ball valve c/w a 2" BSP spigot with retained dustcap.
			Safety Relief Valve	2 ½" BSP Super Maxi pressure / vacuum valve set at 4.4 bar/ 0.21 bar with flame gauze fitted.
			Level Gauge	Bayham level gauge fitted to tank body in line with bottom outlet.

Note: The above information is an average representation of technical data. Please consult your OCS representative for more specific data.



Visit our website www.exsif-ocs.com

EXSIF OCS Limited, Aberdeen. Tel: + 44 (0) 1224 894643 Contact: info@exsif-ocs.com