
T11 7,500 LITER

Off-shore Minitank



7,500 LITER



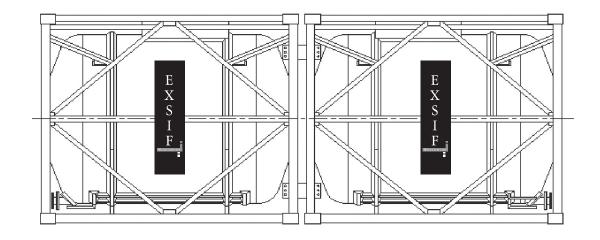

T11 7,500 LITER

Off-shore Minitank

General Specification

Dimensions Length	mm 2991	ft-in 9′ 10″		Internal Finish	Cold rolled ASTM 2B, interior acid cleaned.		Safety Relief Valve	2 ½" BSP high flow pressure/vacuum valve set at 4.4 Bar/0.21 Bar (63.8 psi/3 psi).
Width Height	2438 2438	8′ 0″ 8′ 0″		Weights Tare	kgs 2,300	lbs 5,071	Level Gauge	Flame trap fitted. Bayham level gauge fitted at rear of tank.
Capacity	Liters 7,567	Gallons 1,665	US Gallons 2,000	Max Payload Frame Fork lift pockets	10,700	23,589	Steam Heating	4 off runs at 4 bar (58 psi) working pressure with 1" BSP inlet and ¾" BSP outlet connections.
Shell Material	316 Stainless Steel			TOIK IIII POCKEIS	Full lift fork pockets with IMDG compatible closures.		Options	Insulation.
Barrel/ Head Thickness	4.41/4.50mm (0.174/0.177")			Lifting Lugs	4 off lifting shackles.	g lugs for use with 8.5t bow		Electrical heating. Adaptor frames are available to allow the tanks to be carried on tank chassis allowing
Pressures	Working = 4 Bar (58.0 psi) Test = 6 Bar (87.0 psi) Vacuum = 0.4 Bar (5.9 psi)			Fittings Manlid	Fort Vale 5 fixings.	00mm, fully hinged with 8		ease of loading and off loading one tank at a time.
				Air Line	1 ½" full bore Ball valve with 1 ½" BSP connection. A second ¾" BSP connection airline terminates at the rear of the tank at ground level. 3" 45° stainless steel foot valve, butterfly valve with a 3" BSP termination. Remote closure system fitted.			Two units can be bolted together and transported empty as a 20' 0" unit.
Design Temp	130°C (266°F) ASME VIII Division 1 2 coat system with a Zinc rich primer.						Approvals	UN Portable tank (T11) IMDG, CFR49, ADR/RID, UIC, TIR, CSC, TC, DNV 2.7-1 off-shore approval.
Design Code				Bottom Outlet				
External Finish								

Note: The above information is an average representation of technical data. Please consult your EXSIF Worldwide representative for more specific data.

EXSIF Worldwide, Inc.
Corkstraat 46
Rotterdam 3047 AC
The Netherlands
Tel: + 31-10-240-40-20
Fax: + 31-10-240-40-29
email: sales.europe@exsif.com

EXSIF Worldwide, Inc.
1225 North Loop West, Suite 300
Houston, TX 77008
United States
Tel: +1-713-869-9988
Fax: +1-713-869-7827
email: sales.americas@exsif.com

EXSIF Worldwide, Inc. 80 Anson Road #24-01A Fuji Xerox Towers Singapore 079907 Tel: + 65-6224-2633 Fax: + 65-6224-2634 email: sales.asia@exsif.com EXSIF Worldwide, Inc. Shanghai Kerry Center Unit 1502 1515 West Nanjing Road Shanghai 200040 People's Republic of China Tel: + 86-21-6289-1230

Fax: +86-21-6289-1223 email: sales.china@exsif.com



Visit our web site www.exsif.com